



# MODEL: GT-BS08

Oder Code	GT-BS08
LED	5W/Pcs Osram
Row	Single Row
Operating Voltage	10-30V DC
Operating Temp	-40~+80 °Celcius
Beam Pattern	Flood, Beam, Combo
ColorTemperature	5700K
Lifetime	30000+h
Lens Material	Polycarbonate
Housing Material	Aluminum
Coating Powder	Semi-Gloss Black
Mounting System	304 Stainless Steel Side Mount Aluminum Bottom Mount
Pressure Equalization Vent	Yes
Waterproof Rate	Ip67
EMC Protection	CISPR 25 Class 3

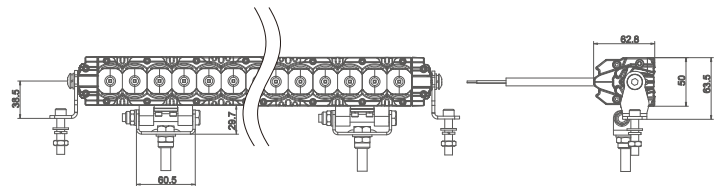

Plastic Decorative Part:  
Different Colors  
Are Available

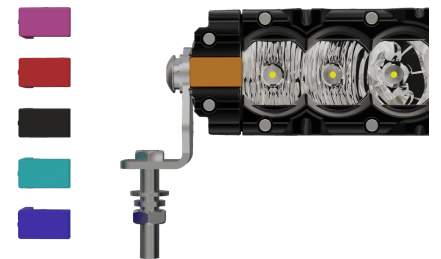

MODEL	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Cable Length	Net Weight	Package Standard
GT-BS08-6L	7.68"	30W	1.25A@12V, 0.63A@24V	6PCS*5W Osram	2100Lm	400mm	0.71Kg/Pcs	6Pcs/Carton
GT-BS08-10L	11.70"	50W	2.08A@12V, 1.04A@24V	10PCS*5W Osram	3500Lm	400mm	1.00Kg/Pcs	6Pcs/Carton
GT-BS08-20L	21.60"	100W	4.16A@12V, 2.08A@24V	20PCS*5W Osram	7000Lm	800mm	1.62Kg/Pcs	4Pcs/Carton
GT-BS08-30L	31.70"	150W	6.25A@12V, 3.13A@24V	30PCS*5W Osram	10500Lm	800mm	2.20Kg/Pcs	2Pcs/Carton
GT-BS08-40L	41.70"	200W	8.33A@12V, 4.17A@24V	40PCS*5W Osram	14000Lm	800mm	3.10Kg/Pcs	2Pcs/Carton
GT-BS08-50L	51.90"	250W	10.41A@12V, 5.20A@24V	50PCS*5W Osram	17500Lm	800mm	5.37Kg/Pcs	2Pcs/Carton

